


FOR SMT / SMD and other similar types

	Item(项目)	Required Characteristics(要求)	Test Method / Condition(测试方法)
Electrical Characteristic tests (电特性试验)	Electronic characteristic test of major products 主要产品电特性试验	Refer to catalogue of specific products 参照具体产品目录页	Refer to catalogue of specific products 参照具体产品目录页
	Overload test Reference documents: JIS C5311-6.13 过负荷试验	1. During the test no smoke, no peculiar, smell, no fire 2. The characteristic is normal after test 1. 试验过程中无冒烟, 异味, 着火等, 2. 试验后产品特性正常.	Apply twice as rated current for 5 minutes. (It's not application to some special design) 通两倍额定电流 5 分钟 (部分特殊设计产品不适用)
	voltage resistance test Reference documents: MIL-STD-202G Mthod 301 绝缘耐压测试	1. During the test no breakdown 2. The characteristic is normal after test 1. 试验过程中无击穿 2. 试验后产品特性正常	1. For parts with two coils 2. DC1000V, Current: 1mA, Time: 1Min. 1. 只针对SMT二组绕线或以上之产品 2. 电压DC1000V, 电流1mA, 时间1分钟.

Curve of Heat endurance of Reflow soldering test

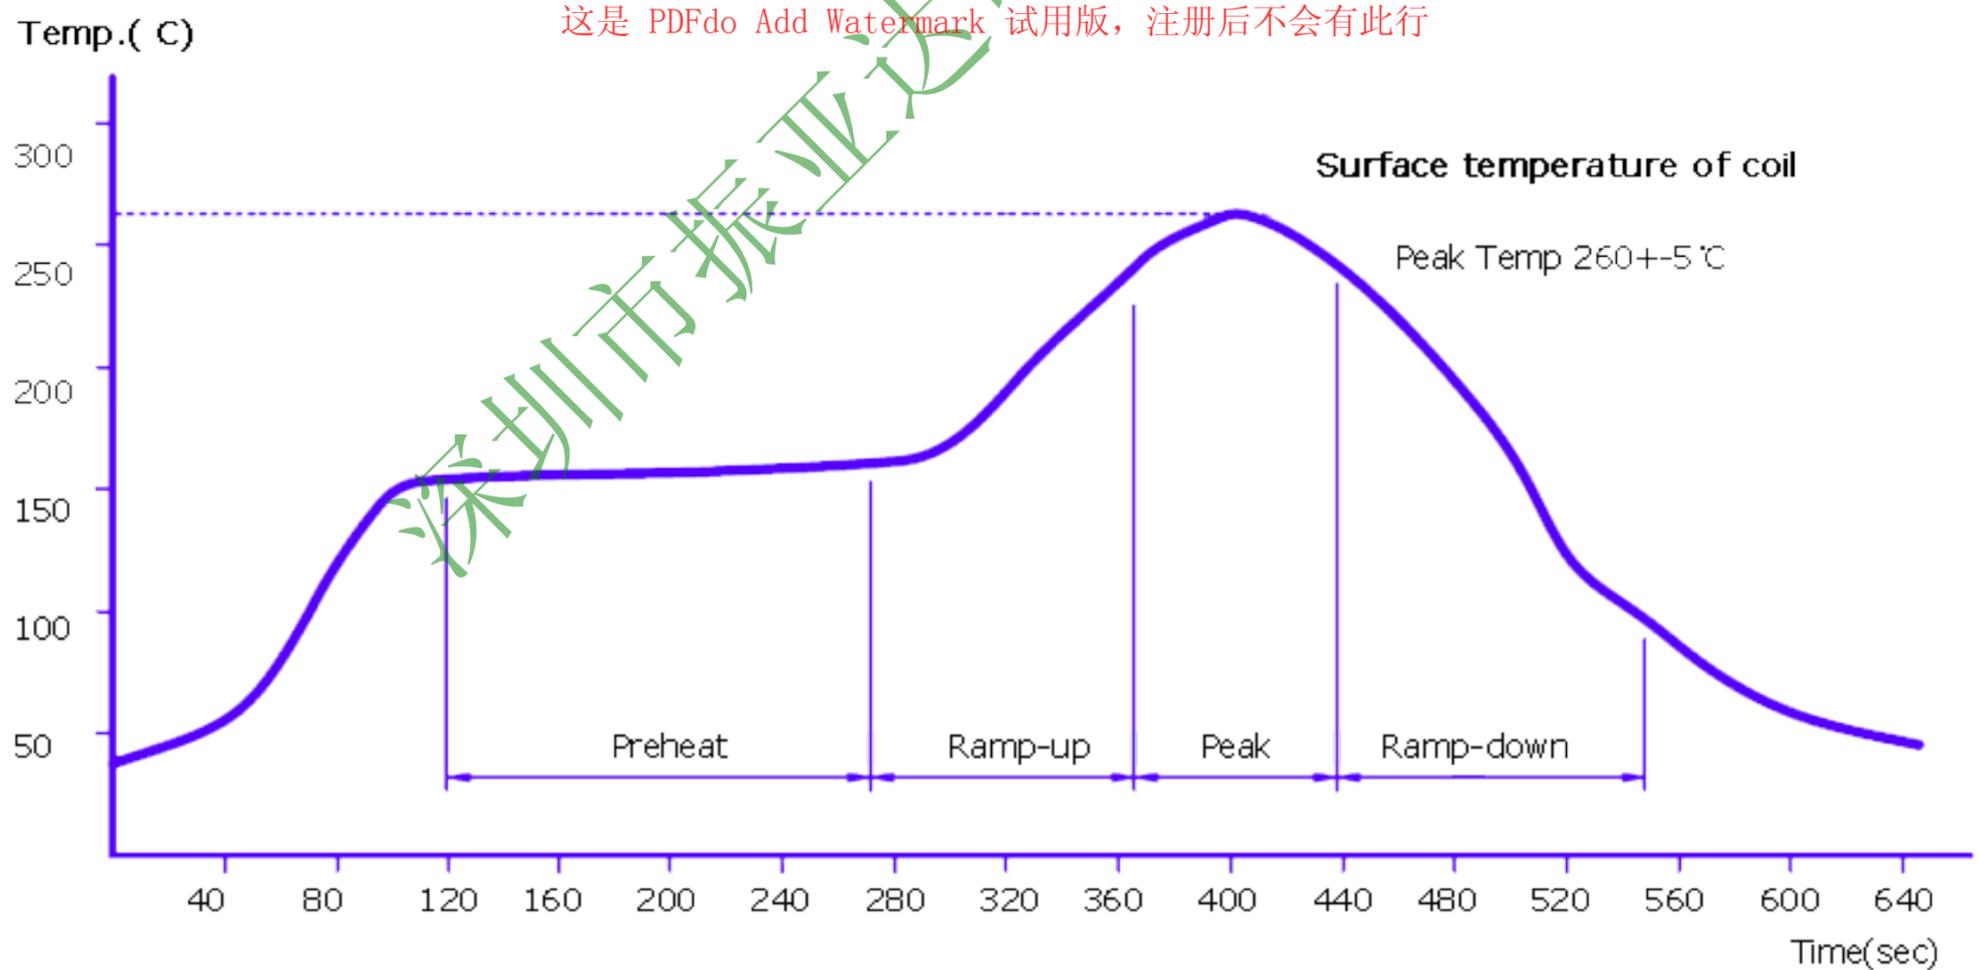

1. This peak temperature only applicable to some specific parts. The operating parameter may vary according to the part type.
2. A test is made under the conditions mentioned above. And it is left 1 hours in the normal temperature and humidity. After that, no mechanical and electrical defeat should be found out.
3. The reflow condition is according to the machine used by our company

NOTE: Above specifications are only for reference, follow confirmation documents for the specific test condition