

RM 型高频变压器

产品说明：

具有漏磁小，损耗低，工作频率宽，抗干扰性能强等特点，广泛应用于开关电源、传真机、电视机、显示器等。常用的型号有 RM4, RM5, RM6, RM8, RM10, RM12 等。

下表列出部分产品的外形尺寸及输出功率。

随着磁材特性和工作频率的不同，最大输出功率会有所不同，表中数据仅供参考。

测试条件 1KHz/1V，耐压 AC2000V，绝缘电阻：DC500V ≥200MΩ。




Product Description:

Has the characteristics of magnetic leakage, low loss, wide working frequency, strong anti-interference performance, etc., widely used in switching power, fax, TV, monitor, etc.. Commonly used models are RM4, RM5, RM6, RM8, RM12, RM10, etc..

The following table lists the outline dimensions and output power of some products.

With the magnetic characteristics and the operating frequency, the maximum output power will be different, the data in the table is for reference only.

The test conditions of 1KHz/1V, voltage AC2000V, insulation resistance: DC500V = 200M.

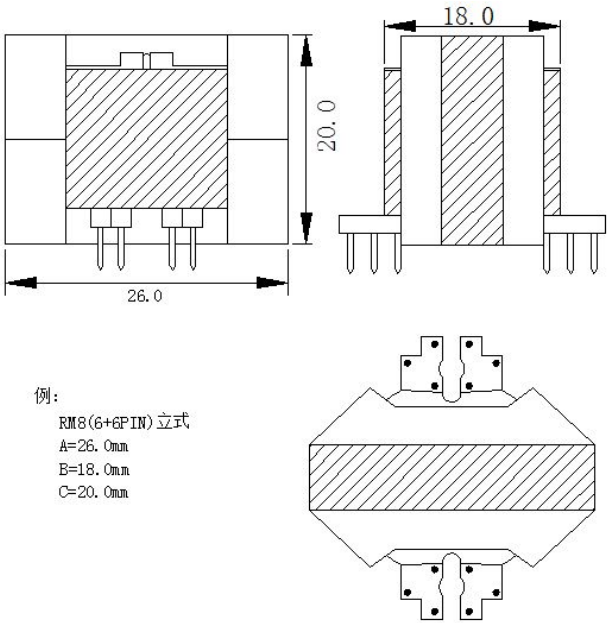

序号	规格	外型尺寸 mm			参考 VA		重量
		A	B	C	f=50KHz	f=100KHz	参考值 g
1	RM4	14	10	11	2	4	5
2	RM5	18	11	11	6	8	7
3	RM6	18	14	17	12	18	10
4	RM8	26	18	20	22	45	18
5	RM10	31	28	22	60	80	28
6	RM12	40	26	26	120	180	55

以上数据仅供参考。The above data are for reference only.

*产品说明书内的规格和参数仅供参考，可能不包含最新的产品信息，本产品规格若有更改，恕不事先通知。在您订购前，请向本公司索要相关技术资料，如您需要了解最新的产品信息，请登录本公司网站或来电咨询。

Product specification within the specifications and parameters for reference only, may not contain the latest product information, the product specifications are subject to change without prior notice, anger. In your order, please ask the relevant technical information to the company, if you need to know the latest product information, please visit our website or contact us.